


CMID recommends the Banjo 1 1/4" Poly T filter with 30 mesh.

Local vendor: G&R AG Products Inc. • (208)454-2288 • 905 Simplot Blvd., Caldwell, ID 83605. Price of filter may vary. (Average price of filter \$61.00)

BANJO STRAINERS


Polypropylene "T" Line Strainers

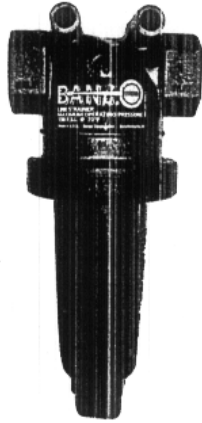

3/4" And 1"

FEATURES

- Heavy-duty glass reinforced polypropylene.
- Clean-out plug.
- 304 stainless steel reinforced screens.
- EPDM gaskets standard. FKM (Viton type) available.
- 150 PS.I. at 70°F.

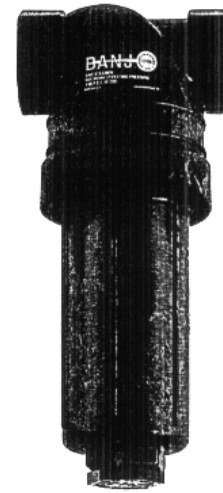

1 1/4" And 1 1/2"

2" POLY RIBBED SCREEN COLOR CHART

MESH SIZE	RIB COLOR
6 Mesh	White
12 Mesh	Black
20 Mesh	Beige
30 Mesh	Yellow
40 Mesh	Brown
50 Mesh	Red
80 Mesh	Blue
100 Mesh	Green
120 Mesh	Black

3/4" AND 1" POLY "T" STRAINERS

PART NO.	SIZE	DESCRIPTION	QTY
LST075-16	3/4" x 3/4"	Strainer - 16 Mesh S.S. Screen	1
LST075-30	3/4" x 3/4"	Strainer - 30 Mesh S.S. Screen	1
LST075-50	3/4" x 3/4"	Strainer - 50 Mesh S.S. Screen	1
LST075-80	3/4" x 3/4"	Strainer - 80 Mesh S.S. Screen	1
LST075-100	3/4" x 3/4"	Strainer - 100 Mesh S.S. Screen	1
LST100-16	1" x 1"	Strainer - 16 Mesh S.S. Screen	1
LST100-30	1" x 1"	Strainer - 30 Mesh S.S. Screen	1
LST100-50	1" x 1"	Strainer - 50 Mesh S.S. Screen	1
LST100-80	1" x 1"	Strainer - 80 Mesh S.S. Screen	1
LST100-100	1" x 1"	Strainer - 100 Mesh S.S. Screen	1


1 1/4" AND 1 1/2" POLY "T" STRAINERS

PART NO.	SIZE	DESCRIPTION	QTY
LST125-16	1 1/4" x 1 1/4"	Strainer - 16 Mesh S.S. Screen	1
LST125-30	1 1/4" x 1 1/4"	Strainer - 30 Mesh S.S. Screen	1
LST125-50	1 1/4" x 1 1/4"	Strainer - 50 Mesh S.S. Screen	1
LST125-80	1 1/4" x 1 1/4"	Strainer - 80 Mesh S.S. Screen	1
LST125-100	1 1/4" x 1 1/4"	Strainer - 100 Mesh S.S. Screen	1
LST150-16	1 1/2" x 1 1/2"	Strainer - 16 Mesh S.S. Screen	1
LST150-30	1 1/2" x 1 1/2"	Strainer - 30 Mesh S.S. Screen	1
LST150-50	1 1/2" x 1 1/2"	Strainer - 50 Mesh S.S. Screen	1
LST150-80	1 1/2" x 1 1/2"	Strainer - 80 Mesh S.S. Screen	1
LST150-100	1 1/2" x 1 1/2"	Strainer - 100 Mesh S.S. Screen	1


STANDARD MESHES AND DATA (For General Use Only)

MESH	MICRONS	WIRE DIAM.	OPENING	% OPEN AREA	MESH	MICRONS	WIRE DIAM.	OPENING	% OPEN AREA
6 Mesh	3360	.035	.132	62.7	30 Mesh	595	.012	.021	40.8
8 Mesh	2380	.028	.097	60.2	40 Mesh	446	.012	.021	36.0
10 Mesh	2000	.025	.075	56.3	50 Mesh	297	.009	.011	30.3
12 Mesh	1680	.023	.060	51.8	80 Mesh	177	.0055	.007	31.4
16 Mesh	1190	.018	.044	50.7	100 Mesh	149	.0045	.005	30.3
20 Mesh	841	.016	.034	46.2	120 Mesh	116	.0037	.0046	30.5

LINE STRAINERS



INSTALLATION:

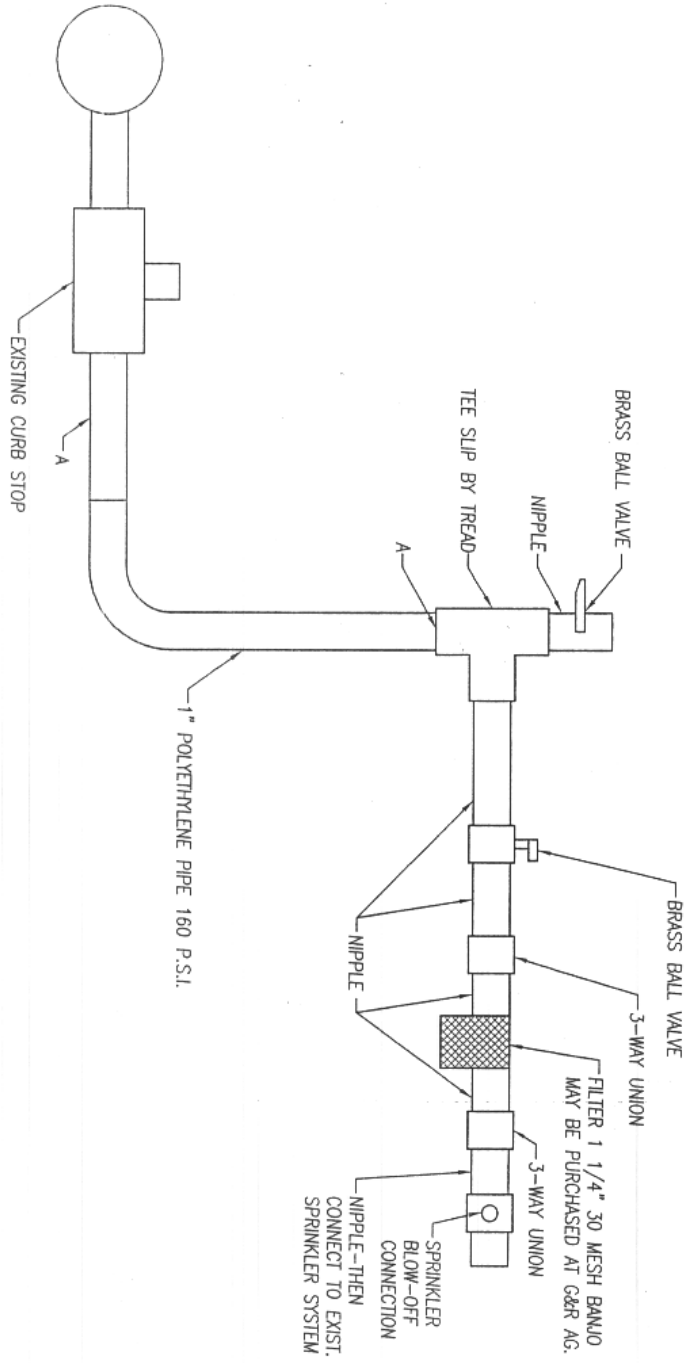

NOTES
A. 1" BRASS MIPX BARED ADAPTOR WITH TWO (2) STAINLESS STEEL CLAMPS.